


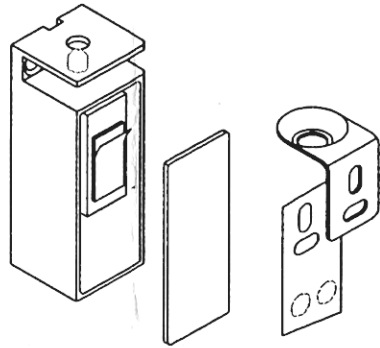
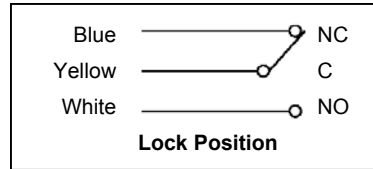
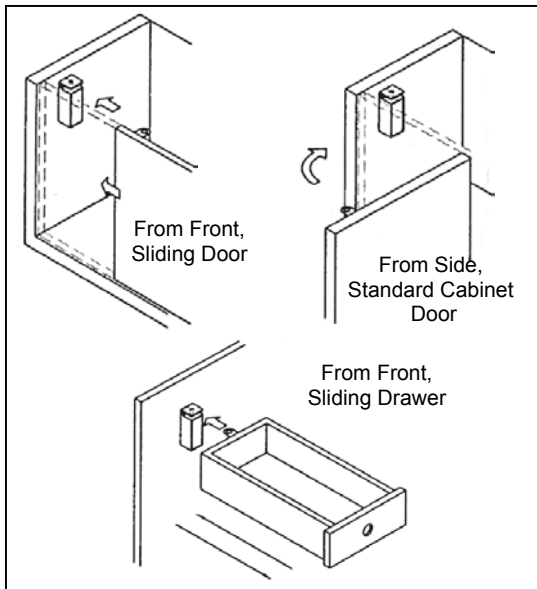
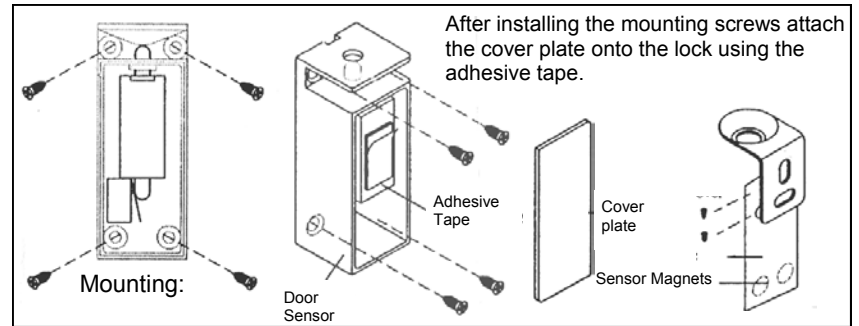


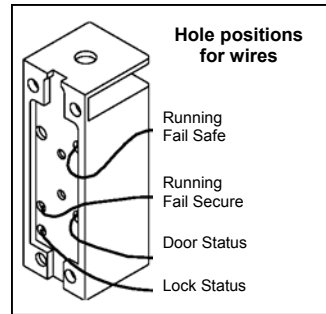




ROFU 3810 CABINET LOCK

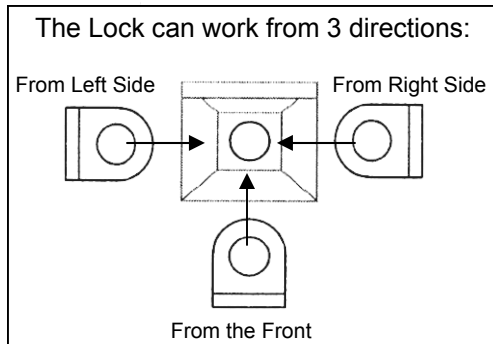

Specifications:
 Input: 12 or 24VDC
 Reversible Fail Secure to Fail Safe
 with
 Door Status & Lock Status
 500lb holding force
 Current Draw: 300mA @ 12VDC
 150mA @ 24VDC

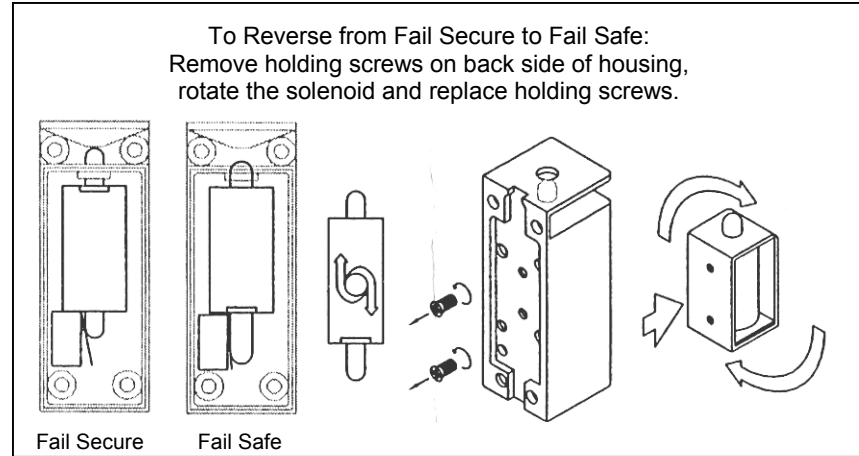

Wire Connection, Connect provided varistor according to diagram

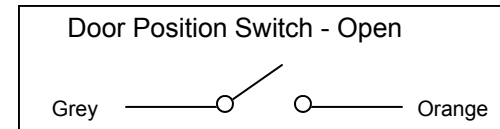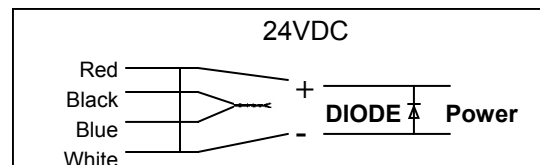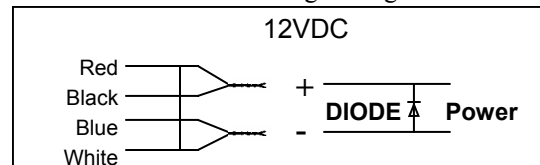

ROFU International Corp.
 10029 South Tacoma Way, E-11
 Lakewood, WA 98499
 Ph: 800-255-7638 / 253-922-1828
 Fax: 888-840-7272 / 253-922-1728
 www.rofu.com / email: techhelp@rofu.ws

