


**ROFU Pushbutton Installation Instructions  
for ROFU models 9300,9310, 9320 & 9330  
Double SPST**

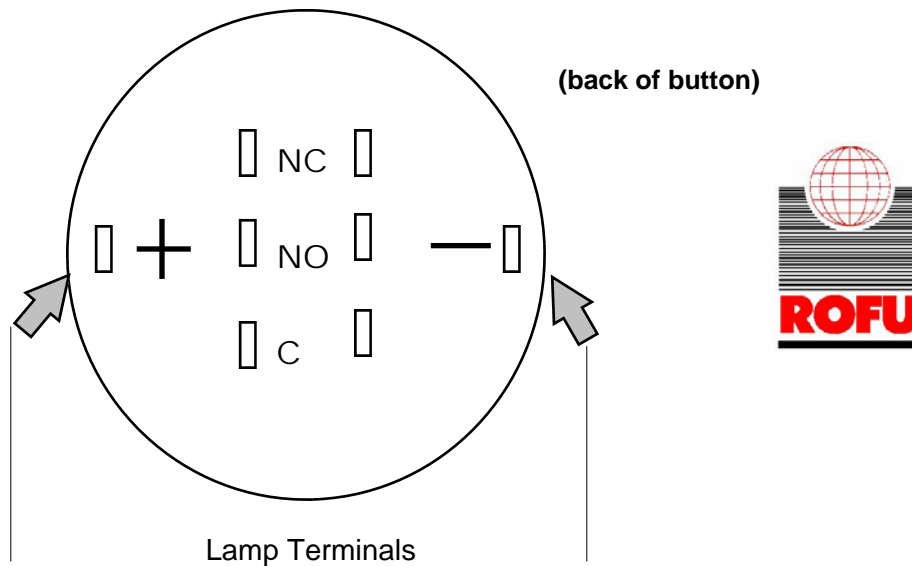

1. Remove parts from the box. Place pushbutton in hole, align, tighten with ring nut.
  2. Slip connector leads over the “Common” (C) and “Normally Open” (NO) or “Normally Closed” (NC) terminals, depending on whether fail secure or fail safe releases are operated.
  3. In case a lamp is used, make sure the slot on one side of the lamp slides into the ridge inside the switch cavity. Observe polarity for the lamp terminals and voltage.
  4. Install in standard electric utility box or pull-station fire alarm box for surface application or mount on 1 3/4” aluminum profile (9310,9330)
- NOTE: Utility boxes are not supplied.**

**ROFU International Corporation**  
10029 South Tacoma Way, E-11  
Lakewood, WA 98499  
253-922-1828, FAX 253-922-1728