




ROFU® MAGNETIC DOOR LOCKING DEVICE 8011-003 Delayed Egress Locking Systems

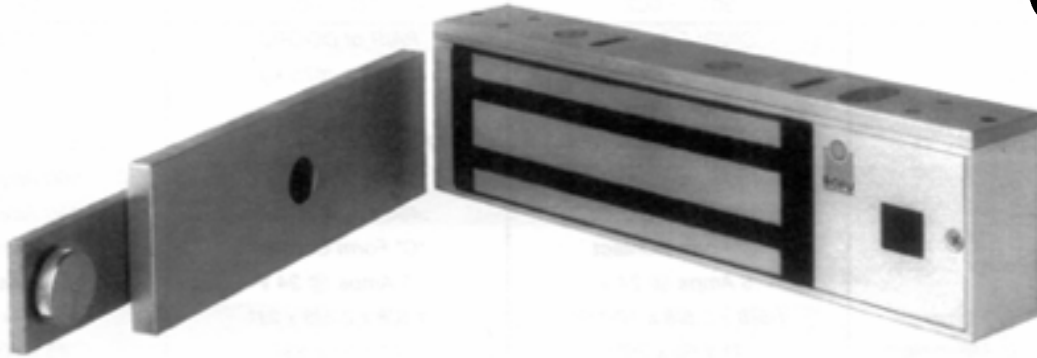

THE ROFU 8011-003

- ⇒ Fully complies with NFPA Life Safety Code 101.
- ⇒ UL Listed
- ⇒ State of the art microprocessor technology
- ⇒ Combines life safety, security and cost effectiveness
- ⇒ Ideal for single or multiple door installations
- ⇒ Ideal for retrofit as well as new installations
- ⇒ Installer friendly! no modification to existing door hardware required

Standard Features

- ⇒ Self contained system
- ⇒ Built in Piezo Alarm at 85db
- ⇒ 12 VDC output for remote alarm
- ⇒ Fire Alarm contact
- ⇒ Anti Tamper Alarm
- ⇒ Reset contact for keyswitch or remote resetting
- ⇒ Relay for remote monitoring
- ⇒ Bond Sensing circuit
- ⇒ Built in watch dog circuit to check system's operation
- ⇒ Adjustable Nuisance Time Delay to prevent false alarms
- ⇒ 15 second egress delay
- ⇒ Two reset methods
- ⇒ Automatic Malfunction Alarm and release
- ⇒ Low current draw of 280mA
- ⇒ For Dimensions see ROFU 8011 Series

Optional Features

- ⇒ 24 VDC available
- ⇒ 30 second egress delay



NOT TO SCALE - TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE