



ROFU[®] MAGNETIC DOOR LOCKING DEVICE MODEL 8035 MINI SHEAR LOCK



In ROFU #21036 Housing



In ROFU #21037 Housing

The 8035 mini shear lock combines a versatile, installer-friendly mounting configuration with a revolutionary new patented adjustable shear lock design. In addition, its compact size will make it one of the most sought after new products in today's market due to its size-to-strength ratio.

STANDARD FEATURES

- Holding Force: 1200 lbs. (550 Kg)
- Easy Installation
- Minimum Door Gap: 3/32" (2mm)
- Self Centering
- Fire Safe: Releases instantly when power is disconnected. No residual magnetism.
- Fail Alarm: May be released upon activation of a fire alarm
- No Inrush
- Voltage: 12/24VDC Field Adjustable
- Current Draw: 350mA at 12VDC
190mA at 24VDC
- Limited Lifetime Warranty
- Mounting Hardware Included with unit.



SPECIFICATIONS

- Magnet Dimensions: 7 1/8" x 1 3/8" x 1 1/8" (LxWxD)
- Armature Dimensions: 7 1/8" x 1 3/8" x 1 3/4" (LxWxD)
- Finish: Magnet and Armature plate, nickel plated (Housing is US28)

OPTIONS


- Monitoring: Hall effect crystal sensor with relay output to indicate the door is sealed. Specify: 8035-002
- Housing for Surface Mount Installations, Specify ROFU #21036 or ROFU #21054
- U-Brackets for glass door Installations, Specify ROFU #21037

NOT TO SCALE - TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE




INSTALLATION OPTIONS FOR ROFU® MODEL 8035


ROFU #21036, Housing for
ROFU 8035 Mini Shear Lock

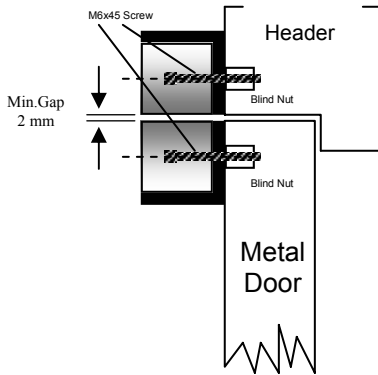

ROFU #21037, Housing for
ROFU 8035 Mini Shear Lock
On Glass Doors

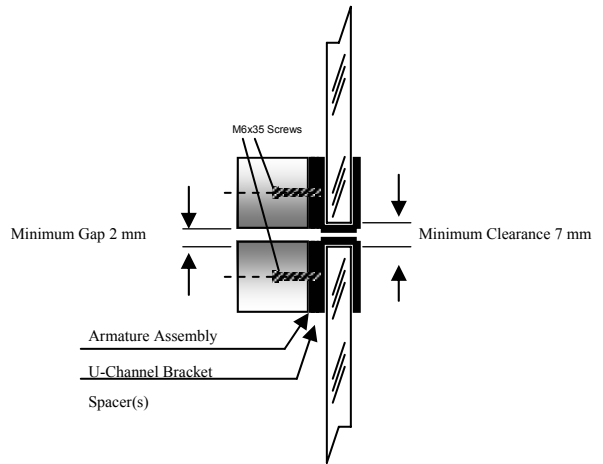

ROFU 8035 Mini Shear Lock
Mortise Installation

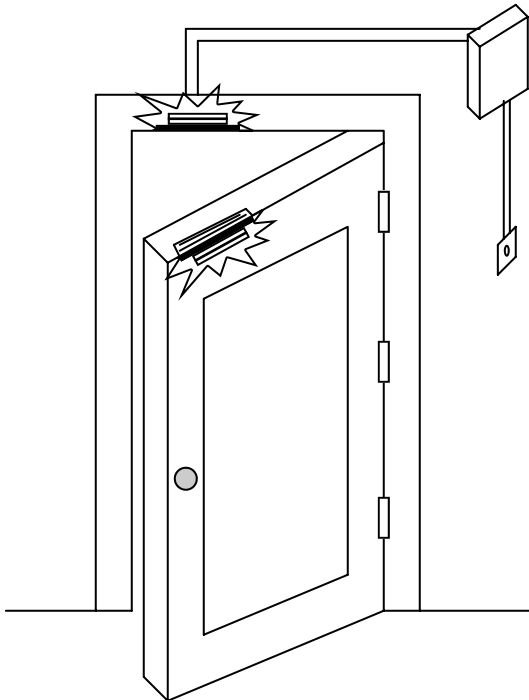

ROFU #21054, Housing with L-Brackets for
ROFU 8035 Mini Shear Lock

