

ROFU[®] EXIT SWITCHES 9350 & 9360 SERIES



ROFU 9350



ROFU 9360




ROFU 2"x 2" illuminated Exit Button

- 1/4" Extruded Aluminum cover provides durability and tamper resistance.
- Spanner head stainless steel machine screws for mounting on standard electrical box discourage unauthorized attempts to remove plate. Spanner wrench supplied.
- Standard with high quality long life LED (xtra-bright & xtra life)
- SPDT Micro-switch
- "PUSH TO EXIT" Font size is 5/16" tall.

Specifications

- Specify Finish: US28 (Aluminum) or US40 (Dark Anodized Bronze)
- Specify Voltage of xtra-bright LED: 12V or 24V

ROFU[®] EXIT SWITCHES 9350 & 9360 SERIES

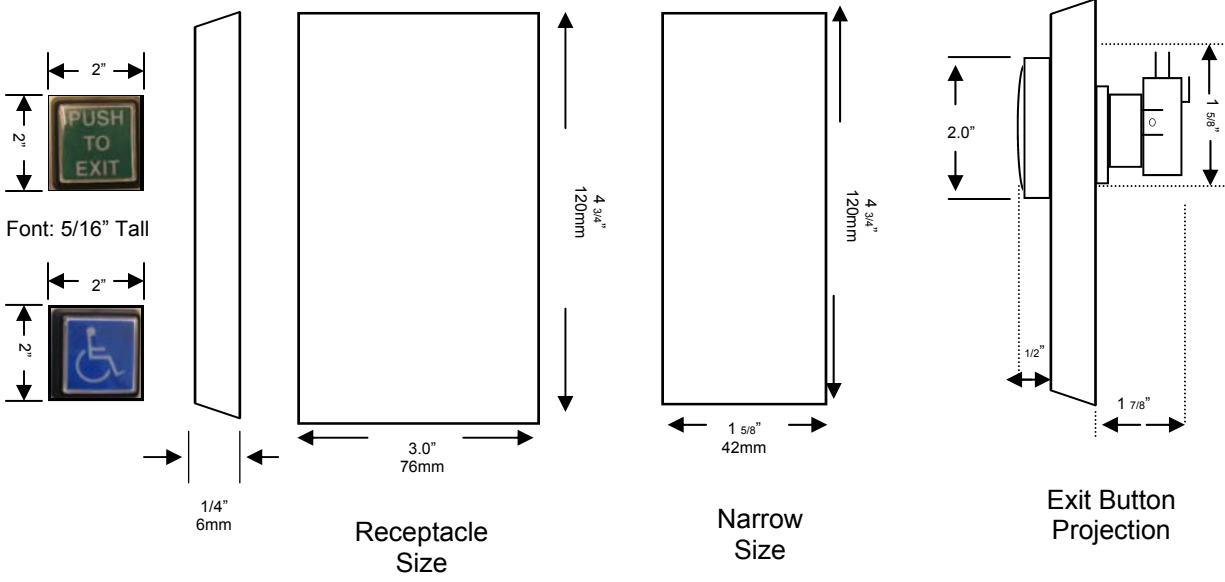

ROFU PART#	Description	Switch Specs	Contacts
9350-US28	Green w/"PUSH TO EXIT" SPDT - 12V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C
9350-US40	Green w/"PUSH TO EXIT" SPDT - 12V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C
9351-US28	Green w/"PUSH TO EXIT" SPDT - 24V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C
9351-US40	Green w/"PUSH TO EXIT" SPDT - 24V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C
9360-US28	Blue w/ Handicapped Logo SPDT - 12V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C
9360-US40	Blue w/ Handicapped Logo SPDT - 12V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C
9361-US28	Blue w/ Handicapped Logo SPDT - 24V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C
9361-US40	Blue w/ Handicapped Logo SPDT - 24V LED	10A -1/2 HP 125/250VAC	Momentary 1 N/O & 1 N/C