

# Universal Electric Strike

## Introducing the 2450 KIT & 2450FR KIT



CE Certification

RoHS Certification

t<sup>o</sup> 32°F to 120°F  
(0°C to 49°C)

**2450 KIT**


2450 Kit is a universal, UL listed electric strike, compatible with a wide range of cylindrical locksets. The 2450 Kit is dual voltage and field reversible between fail-safe and fail-secure. Included in each kit is a faceplate for prefab metal frames (4-7/8") and a faceplate for wood frames (7-15/16"). Also, a fire rated version is available, 2450FR KIT.

### Features:


- Dual voltage 12/24 VDC field selectable
- Field reversible: fail-safe or fail-secure
- Static strength 1500lb (654 kg)
- Endurance Rating: 250,000 cycles UL tested; 1,000,000 cycles factory tested
- Brushed stainless steel finish, US32D
- UL 1034 burglary resistant
- UL 294 Access Control System
- UL 10B/10C Fire Rating (2450FR KIT)
- 2450 KIT: Zinc Alloy Material  
2450FR KIT: Stainless Steel Material
- Current Draw: 12VDC = 300mA  
24VDC = 150mA

### Dimensions:

- **Faceplate 1:** 1-1/4" x 4-7/8"
- **Faceplate 2:** 1-7/16" x 7-15/16"

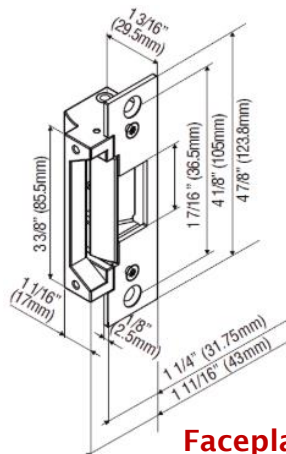

**Faceplate 1**

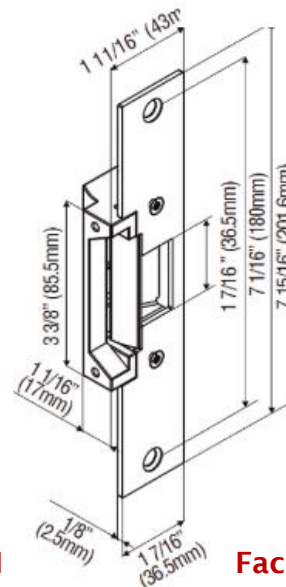

**Faceplate 2**